


BATEMAN



RB16

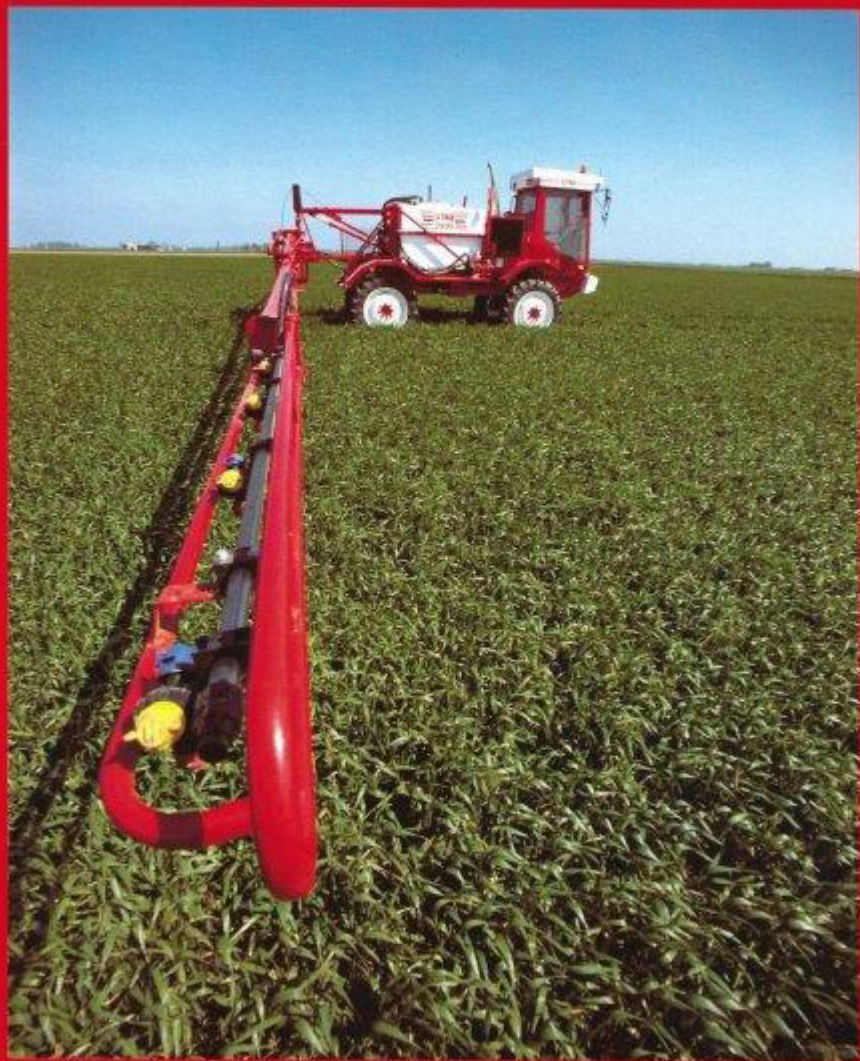

SPECIFICATIONS

Dimensions

Height	3.3m
Width	2.8m
Length	6.6m
Ground Clearance	0.85m
Wheel Base	3.0m
Turning Radius	4.4m
Weight	5350kg
Fuel Capacity	220 litres

Steering

Positive Link 2/4 wheel steer, fully hydrostatic

Suspension

Hydraulic active front and rear

Wheel Track

Hydraulic adjustable axes with 18 inches variable width

Engine and Transmission

John Deere 125hp, 4 cylinder water cooled Turbo charged diesel

Fully Hydrostatic four wheel drive

Variable from 0 up to 25mph

Primary braking with hydrostatic operated or automatically applied when engine stopped

Cab

Steel construction

Tinted glass

Fully tiltable

Rubber mounted suspension

Carbon filtration

Heater

Fully air conditioned

Radio cassette

Cledded and soundproofed

360° working lights/warning beacon

Fresh water hand/eyewash

Pneumatically operated step

Air suspension seat with fore and aft movement

Raise, lower and tilt steering column

Airline pickup point

Sprayer

Tank GNP 2500 litres and 200 litre tank wash

Boom Bateman Contour Gull Wing

Width 18,20,24 metre with 12 metre fold

Filling

Pump 6 piston diaphragm

Stainless steel hopper, can wash

twon ventura softbooster quick fill

LHS5000

Pneumatic diaphragm line valves

Ramsay box

Boom levelling override

Full set of demount jacks

Wheels

Row crop 12.4/32in

Controls

Joystick forward / reverse and sprayline controls

Hydraulic spools

Options

Tank - 2000/3000 litres

Twin line including nozzles

Purge system with triplex nozzles

Spreader skid unit including demount jacks

Bout marker

11.2/36in row crop wheels

9.5/36in heavy duty

Low ground pressure tyres

Bateman Sow-Low drill

Air assisted sleeve boom

Twin pump including 3in plumbing

BATEMAN ENGINEERING LIMITED

BYCOTT, CHUMLEIGH, DEVON, EX18 7DS

Telephone - 01769 580439

Fax - 01769 581023

eMail - mail@bateman-eng.co.uk

We reserve the right to alter specifications without prior notice

Our policy is one of continuous development